



POWERLIFT PL-X OUTRIGGER BASE

Our revolutionary lift is a practical solution for tight spaces, replacing ladders in schools, offices, industrial buildings, residences, and more.

PRACTICAL

- Complies with ANSI standards and OSHA regulations
- Stable at all heights up to 20 ft (6.10 m) platform height
- 350 lb (159 kg) platform capacity

SMART DESIGN

- Powered by a cordless drill
- Masts stow and stack for quick extension
- Outriggers adjust to accommodate work surface
- Ergonomic platform design with large tool tray

PORTABLE

- Fits through most standard doors
- Easily rolls over most terrains
- Zero-turn radius
- Can be carried up stairs when disassembled

Note: For indoor use only.




» **DID YOU KNOW?**
ReechCraft's PowerLift outrigger base comes standard with both the PL-X16 and PL-X20! Visit powerlift.reechcraft.com for more information and to explore other base options!



» GENERAL SPECIFICATIONS

DESCRIPTION		PL-X16	PL-X20
	Platform Capacity	350 lbs (159 kg)	
	Power Source	AC or DC Drill	
	Drive	Gear Drive with Integrated Brake	
	Maximum Manual Force	45 lbs (200 N)	
	Maximum Wind Speed	0 mph (0 m/min)	
	Maximum Chassis Inclination	0 Degrees	
	Platform Dimensions (L x W)	23.3 in. (592 mm) x 24.8 in. (630 mm)	
	Swivel/Lockable Caster Diameter	5 in. (127 mm)	
	Machine Weight	394 lbs (179 kg)	518 lbs (235 kg)
A	Stowed Length	51.5 in. (1308 mm)	
B	Stowed Width	30 in. (762 mm)	
C	Stowed Height	69 in. (1753 mm)	
D	Minimum Platform Height	13.5 in. (343 mm)	
E	Ground Footprint Width	67.2 in. (1707 mm)	
F	Ground Footprint Length	64.7 in. (1643 mm)	
G	Distance from Wall Side	20 in. (508 mm)	
H	Distance from Wall Front	10 in. (254 mm)	
I	Erected Mast Height	212 in. (5385 mm)	260 in. (6604 mm)
J	Maximum Platform Height	189.6 in. (4816 mm)	237.6 in. (6035 mm)
M	Maximum Extended Height	234 in. (5944 mm)	282 in. (7163 mm)
N	Maximum Working Height	261.6 in. (6645 mm)*	309.6 in. (7864 mm)*

*Based on platform height plus 6 ft (1.8 m). **Note:** Specifications subject to change without notice.

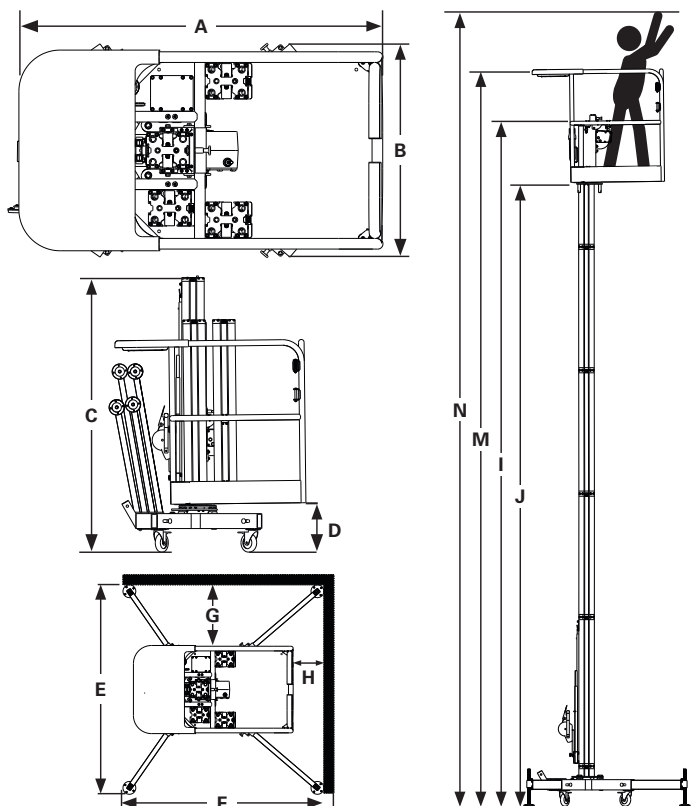

ACCESSORIES + FEATURES




EASILY CARRIED

The PowerLift is the most portable lift on the market. Components can be disassembled, making the PowerLift easy to move.



ERGONOMIC PLATFORM

The PowerLift platform features ergonomic front swinging entry gates and a large, easy-to-reach tool tray.



OVERSPEED BRAKE

The gearbox features an integrated overspeed brake. This provides additional safety by automatically stopping the platform in the event of overspeed.



CASTER WHEELS

The base features four swiveling and lockable casters that allow the PowerLift to rotate 360 degrees for easy positioning.



TRANSPORT HANDLE + WHEEL KIT

The optional transport handle and wheel kit can be attached to the PowerLift to allow the lift to be maneuvered over uneven surfaces with ease. Great for transporting from jobsite to jobsite.



HITCH HAULER

Load, secure, and transport the PowerLift with outrigger base in a matter of seconds using a vehicle's two-inch receiver and the optional Hitch Hauler.

